

DIN 7983 C sim. UNI 6956 EN ISO 7051

Vite autofilettante a testa svasata con calotta e impronta croce H (Phillips), tipo C (punta conica)

DIN 7983 C sim. UNI 6956 EN ISO 7051

Cross recessed H (Phillips) raised countersunk oval head tapping screw, type C (cone point)


Disponibile/Available



A2



A4

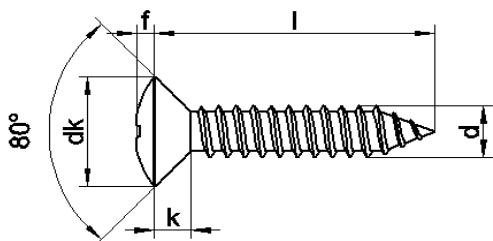

dk	4,3	5,5	6,8	7,5	8,1	9,5	10,8	12,4
f ≈	0,7	0,9	1,2	1,3	1,4	1,5	1,7	2
k ≈	1,3	1,7	2,1	2,3	2,5	3	3,4	3,8
[phillips]	P 1	P 1	P 2	P 2	P 2	P 2	P 3	P 3
l/Ø	ST2,2	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
6,5								
9,5								
13								
16								
19								
22								
25								
32								
38								
45								
50								
60								
70								
80								
90								
100								

last edit 16/04/2019

DRAWING N. 1048