

Śruby z łbem sześciokątnym z gwintem calowym


Hex cap screws (inch series)

wg **ANSI B18.2.1**

acc. to **ANSI B18.2.1**

~ISO 4014, ~ISO 4017

~DIN 931, ~DIN 933

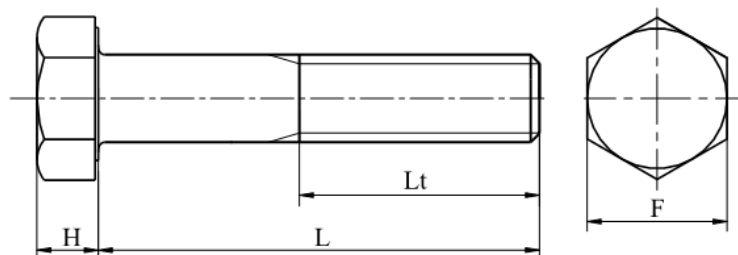

Wymiary

(wszystkie wymiary w calach)

Dimensions

(all dimensions in inches)

Wymiar nominalny <i>Nominal size</i>		1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4	7/8	1	1 1/8
		0.2500	0.3125	0.3750	0.4375	0.5000	0.5625	0.6250	0.7500	0.8750	1.0000	1.1250
<i>F</i>	<i>Nom.</i>	7/16	1/2	9/16	5/8	3/4	13/16	15/16	1 1/8	1 5/16	1 1/2	1 11/16
	<i>Max.</i>	0.438	0.500	0.562	0.625	0.750	0.812	0.938	1.125	1.312	1.500	1.688
	<i>Min.</i>	0.428	0.489	0.551	0.612	0.736	0.798	0.922	1.100	1.285	1.469	1.631
<i>H</i>	<i>Nom.</i>	5/32	13/64	15/64	9/32	5/16	23/64	25/64	15/32	35/64	39/64	11/16
	<i>Max.</i>	0.163	0.211	0.243	0.291	0.323	0.371	0.403	0.483	0.563	0.627	0.718
	<i>Min.</i>	0.150	0.195	0.226	0.272	0.302	0.348	0.378	0.455	0.531	0.591	0.658
<i>L_T</i>	≤ 6	0.750	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250	2.500
	> 6	1.000	1.125	1.250	1.375	1.500	1.625	1.750	2.000	2.250	2.500	2.750

Wymiar nominalny <i>Nominal size</i>		1 1/4	1 3/8	1 1/2	1 3/4	2	2 1/4	2 1/2	2 3/4	3
		1.2500	1.3750	1.5000	1.7500	2.0000	2.2500	2.5000	2.7500	3.0000
<i>F</i>	<i>Nom.</i>	1 7/8	2 1/16	2 1/4	2 5/8	3	3 3/8	3 3/4	4 1/8	4 1/2
	<i>Max.</i>	1.875	2.063	2.250	2.625	3.000	3.375	3.750	4.125	4.500
	<i>Min.</i>	1.812	1.994	2.175	2.538	2.900	3.262	3.625	3.988	4.350
<i>H</i>	<i>Nom.</i>	25/32	27/32	1 5/16	1 3/32	1 7/32	1 3/8	1 17/32	1 11/16	1 7/8
	<i>Max.</i>	0.813	0.878	0.974	1.134	1.263	1.423	1.583	1.744	1.935
	<i>Min.</i>	0.749	0.810	0.902	1.054	1.175	1.327	1.479	1.632	1.815
<i>L_T</i>	≤ 6	2.750	3.000	3.250	3.750	4.250	-	-	-	-
	> 6	3.000	3.250	3.500	4.000	4.500	5.000	5.500	6.000	6.500



Śruby z łbem sześciokątnym z gwintem calowym

Hex cap screws (inch series)

wg **ANSI B18.2.1**

acc. to **ANSI B18.2.1**

~ISO 4014, ~ISO 4017

~DIN 931, ~DIN 933

Przykład oznaczania śruby z łbem sześciokątnym, z gwintem calowym 1/2 - 13 zwoi na cal, gwint na części długości trzpienia, długość nominalna $l = 4$ cale, klasy własności Grade 5:

Śruba z łbem sześciokątnym, z gwintem na części długości trzpienia ANSI B18.2.1 1/2 -13 x4 – Grade 5

Przykład oznaczania śruby z łbem sześciokątnym, z gwintem calowym 1/2 - 13 zwoi na cal, gwint na całej długości trzpienia, długość nominalna $l = 4$, klasy własności Grade 5:

Śruba z łbem sześciokątnym, z gwintem na całej długości trzpienia ANSI B18.2.1 1/2 -13 x4 – Grade 5

Example designation of hex cap screw, thread 1/2 - 13, long screw not threaded full length, nominal length 4 in, thread 1/2 - 13, and property class Grade 5:

Hex cap screw, partly threaded ANSI B18.2.1 1/2 -13 x4 – Grade 5

Example designation of hex cap screw, thread 1/2 - 13, short screws threaded full length, nominal length $l = 4$ in, thread 1/2 - 13, and property class Grade 5:

Hex cap screw, fully threaded ANSI B18.2.1 1/2 -13 x4 – Grade 5