

## Surub autoforant pentru panouri sandwich



**Caracteristici:** Otel; Cr3 - zincat alb; Antrenare SW8; Cap hexagonal cu saiba;

1. Varful forant lung permite forarea direct in materiale metalice cu grosimi cuprinse intre **6 si 12 mm** fara a necesita pre-gaurire


2. Forma filetului ofera instalare rapida

3. Cap hexagonal (SW8) combinat cu saiba de diametru 10,5mm

4. Viteza de instalare intre 1.000 si 1.800 RPM

### Date pentru instalare (mm)

	6,3/5,5x75	6,3/5,5x85	6,3/5,5x105	6,3/5,5x130	6,3/5,5x150	6,3/5,5x175	6,3/5,5x200	6,3/5,5x230
Lungime	75	85	105	130	150	175	200	230
Diam. Cap	10,5	10,5	10,5	10,5	10,5	10,5	10,5	10,5
Grosime saiba	1	1	1	1	1	1	1	1
Pas filet 1 (P1)	1,05	1,05	1,05	1,05	1,05	1,05	1,05	1,05
Pas filet 2 (P2)	1,08	1,08	1,08	1,08	1,08	1,08	1,08	1,08
Hexagon (S)	8	8	8	8	8	8	8	8
Capacitate forare	6.0-12.0	6.0-12.0	6.0-12.0	6.0-12.0	6.0-12.0	6.0-12.0	6.0-12.0	6.0-12.0
Grosimea panoului fixat	33-60	38-70	48-90	63-115	83-115	108-160	133-185	163-215

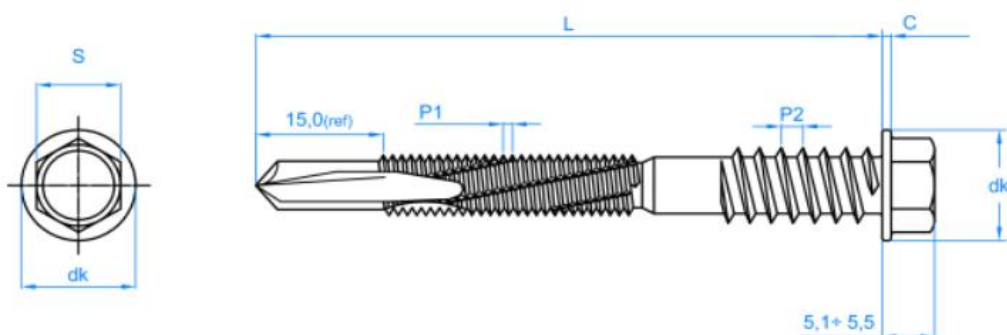

**fix<sup>®</sup>kit**  
PROFESIONIȘTI ÎN FIXARE